



MI-552nn Diplexer L-band/1800-2100

The MI-552nn family of cavity diplexer products, include:

- **MI-552n1**, all ports DC grounded
- **MI-552n2**, diplexer with DC/AISG on Common – High & Low Band
- **MI-552n3**, diplexer with DC/AISG on Common - High Band, Low port DC grounded
- **MI-552n4**, diplexer with DC/AISG on Common - Low Band, High port DC grounded
- **MI-552nA**, auto-sense



This picture is showing MI-552n

MASS™

Microdata Advanced Site Solutions

With our expertise in site system design we are able to provide a solution for any site sharing or upgrade scenario.

Our focus area is RF-filter based solutions including combiners, multi band TMAs, di-, tri- and quadruplexers.

Our product portfolio supports all frequencies for mobile communication bands ranging from 450 MHz to 6 GHz.

Site and network sharing makes it cost efficient to reach sparsely populated areas where new subscribers can contribute to revenue.

MASS™

Advantage

Increases coverage

more traffic & higher ARPU

Increases capacity

more traffic & higher ARPU

Reduces the cost

of network expansion

Minimizes

site acquisition issues

Specifications

Low band		
Frequency Band	1427 - 1517 MHz	
Insertion Loss	< 0.25 dB *	
Return Loss	> 18 dB	
Rejection High Band	50 dB	
Continuous Average Power / Peak Power	250 W / 2000 W	
Intermodulation, 2x43 dBm TX Carrier	-102 dBm (145 dBc)	
High Band		
Frequency Band	1710 - 2170 MHz	
Insertion Loss	< 0.25 dB *	
Return Loss	> 18 dB	
Rejection Low Band	50 dB	
Continuous Average Power / Peak Power	250 W / 2000 W	
Intermodulation, 2x43 dbm TX Carrier	-117 dBm (160 dBc)	
Environmental		
Operating Temperature Range	-40 to +65°C -40 to +149°F	
Operation	ETS 300 019-1-4 Class 4.1E	
Storage	ETS 300 019-1-1 Class 1.2	
Ingress Protection	IP67	
Electrical		With Auto-Sense
DC By Pass	3 A	2 A, drop max 2.4V
AISG pass	Yes	
AISG RL		> 12 dB
AISG Loss		< 1 dB
Lightning Protection	5 kA 8/20 µs	5 kA 8/20 µs
Input Voltage Power		8-30 V Max 0.3W
Mechanical		
	Single Mount	Dual Mount
Dimensions (WxHxD)	118x140x61 mm	118x140x114 mm
With Auto-Sense	118x140x72 mm	118x140x143 mm
Volume	1.0 l	1.9 l
With Auto-Sense	1.2 l	2.4 l
Weight (including brackets)	1.8 kg	3.2 kg
With Auto-Sense	1.9 kg	3.4 kg
Connectors	See Selection Guide for specification	
Mounting	Hose clamps or wall mount (Supporter Pole Diameter:40-140mm)	
Colour	NCS 1502-R	
Bracket	Included	
* typical		


Selection Guide

		Connector (F)	
		7/16	4.3-10
Mount	Single	MI-5520n	MI-5523n
	Dual	MI-5521n	MI-5524n

Auto-Sense: MI-552nA

*The dual filter configuration is mounted on a single bracket for hose clamp or wall mount.

DC/AISG

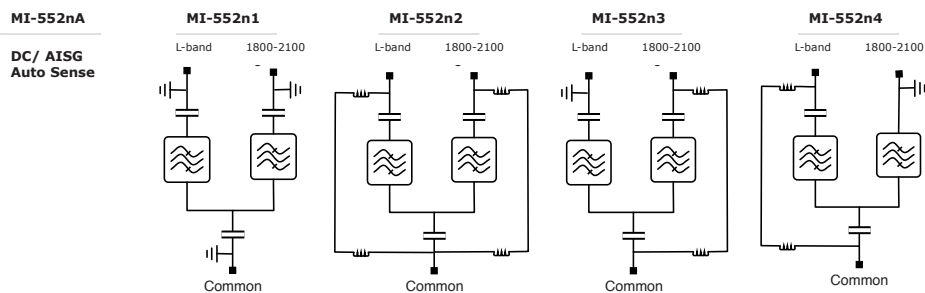

	L-band	1800-2100
MI-552nA	Auto-Sense	
MI-552n1	Block	Block
MI-552n2	Pass	Pass
MI-552n3	Block	Pass
MI-552n4	Pass	Block

This picture is showing MI-5523n

