




MI-31801

Smart Bias Tee/BTS



- RF signal, DC and modulated AISG signal is fed to the antenna from ANT port.
 AISG is modulated and routed from the AISG (male) port on the Smart Bias-T to the ANT port.

- Antenna port, 4.3-10 Female, DC by-pass

- BTS port, 4.3-10 Male, DC shorted and only having RF

MASS™

Microdata Advanced Site Solutions

With our expertise in site system design we are able to provide a solution for any site sharing or upgrade scenario.

Our focus area is RF-filter based solutions including combiners, multi band TMAs, di-, tri- and quadruplexers.

Our product portfolio supports all frequencies for mobile communication bands ranging from 450 MHz to 6 GHz.

Site and network sharing makes it cost efficient to reach sparsely populated areas where new subscribers can contribute to revenue.

MASS™

Advantage

Increases coverage

more traffic & higher ARPU

Increases capacity

more traffic & higher ARPU

Reduces the cost

of network expansion


Minimizes

site acquisition issues

Specifications

Electrical	
Frequency range	555 - 3800 MHz
IL	0.1 dB typ
Min RL	20 dB
Max RF power	750 W
Peak RF power	5000 W
Max DC current	2.7 A
Max voltage drop	1 V
Max intermodulation	-117 dBm @2x43 dBm
Min isolation RF - DC	65 dB
Modem frequency	2.176 MHz
Environmental	
Temperature	-40 °C to +65 °C -40 °F to +149°F
Ingress protection	IP 67
Operation	ETS 300 019-1-4 Class 4.1E
Lightning protection	5 kA 8/20 µs 3 kA 10/350 µs
Miscellaneous	
EMC	EN 301 489-50
Safety Standards	EN 60950
Mechanical	
Weight	0.4 kg 0.88 lb
Size (WxHxD)	61x83x48 mm 2.40x3.27x1.89 in
Connectors	
BTS-Side - 4.3-10 M	
ANT-Side - 4.3-10 F (DC+AISG)	
AISG 8-pin circular M (IEC 60130-9)	
Pin	Function
3	RS485-B
5	RS485-A
6	9-30 VDC
7	DC return (ground)
1, 2, 4, 8	Not connected

Block Diagram

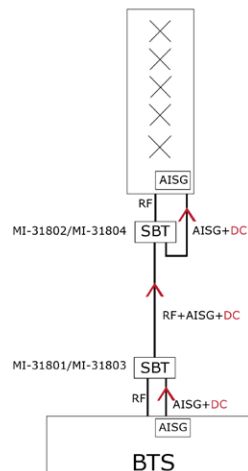

Mechanical Drawing

