

MI-217

TRIPLEXER 1800/2100/2300-2600

The Kaelus MI-217 is a bi-directional Triplexer, designed to combine or split 1800/2100/2300-2600 MHz. The MI-217 provides low insertion loss and high return loss with excellent passive inter-modulation performance in an extremely small and lightweight IP67 capable package

FEATURES

- Enables antenna & coax sharing for 1800/2100/2300-2600 MHz bands systems.
- Compact & lightweight - perfect for Small Cell applications
- Low insertion loss & high return loss
- High passive IM performance
- Single and dual models available
- 7/16 (F) or 4.3-10 (F) connectors
- Hard Wired and DC Autosense versions available
- Provisions for wall or mast mounting



TECHNICAL SPECIFICATIONS

BAND NAME	1800	2100	2300 - 2600
Passband	1710 - 1880 MHz	1920 - 2170 MHz	2300 - 2690 MHz
Insertion loss	0.15 dB typical, 0.2 / 0.4 dB maximum (RX/TX)	0.2 dB typical, 0.5 dB maximum	0.2 dB typical, 0.3 dB maximum
Return loss	> 18 dB maximum	> 18 dB maximum	> 18 dB maximum
Maximum input power	250 W		
Intermodulation products	-160 dBc at 2 x 43dBm TX Carrier		
Rejection	50 dB minimum in 1920 - 2170 and 2300 - 2690 MHz	50 dB minimum in 1710 - 1880, 2300 - 2400 and 2500 - 2690 MHz	50 dB minimum in 1710 - 2170 MHz

ELECTRICAL

Impedance	50 Ω
-----------	------

DC / AISG

For hardwired versions, DC/AISG can be fully connected (DC all) or a specific connection can be ordered (DC custom). For DC autosense versions, the DC/AISG path is automatically selected. In bottom of the tower applications (combiner mode), each RF channel port is sequentially checked for the presence of DC voltage. If more than one port has voltage, the port that has the highest (programmed) priority is passed to the common port. If a short circuit is detected on the common port DC/AISG is disabled. In top-of-tower applications (splitter mode), DC/AISG is passed to all ports that do not present a short circuit. If a short circuit is detected, the shorted RF port will be disabled for DC/AISG while other RF ports remain connected.

Insertion loss	1 dB max
Return loss	12 dB min
Input voltage range	8 - 30 V DC max 0.3 W
DC current rating	3 A continuous, Drop max 2.4 V
Compliance	3GPP TS 37.461

ENVIRONMENTAL

For further details of environmental compliance, please contact Kaelus.


Temperature range	-40 °C to +65 °C -40 °F to +149 °F
Ingress protection	IP67
Lightning protection	5 kA maximum (8/20 us)
MTBF	> 1,000,000 Hours
Compliance	ETSI EN 300 019-1-4 class 4.1E, RoHS

MECHANICAL		
Feature	Single Mount	Dual Mount
Dimensions H x D x W	190 x 150 x 51 mm 7.48 x 5.91 x 2.0 in	190 x 150 x 94 mm 7.48 x 5.91 x 3.7 in
Volume	1.5 l	2.7 l
Weight	3.1 kg/2.6 kg 6.8 lb/5.7 lb	5.3 kg/4.7 kg 11.8 lb/10.3 lb
Finish	Painted, NCS 1502-R (Light Grey)	
Mounting	Hose clamps or wall mount (Supporter pole Diameter: 40 - 140 mm)	
Feature	Single Mount	Dual Mount
Dimensions H x D x W	190 x 150 x 62 mm 7.48 x 5.91 x 2.44 in	190 x 150 x 123 mm 7.48 x 5.91 x 4.84 in
Volume	1.8 l	3.5 l
Weight	3.6 kg/3.1 kg 8.0 lb/6.9 lb	5.8 kg/5.2 kg 12.9 lb/11.6 lb
Finish	Painted, NCS 1502-R (Light Grey)	
Mounting	Hose clamps or wall mount (Supporter pole Diameter: 40 - 140 mm)	

ORDERING INFORMATION

PART NUMBER	CONFIGURATION	OPTIONAL FEATURES	CONNECTORS	DC/AISG CONFIGURATION
MI-2170n	Single Mount	BASE MODEL	7/16 (F)	Refer to DC /AISG table
MI-2171n	Dual Mount	BASE MODEL	7/16 (F)	Refer to DC /AISG table
MI-2173n	Single Mount	BASE MODEL	4.3-10 (F)	Refer to DC /AISG table
MI-2174n	Dual Mount	BASE MODEL	4.3-10 (F)	Refer to DC /AISG table
DC / AISG CONFIGURATION				
MI-217nA	Auto-sense			
MI-217n1	DC TO 2300 - 2600			
MI-217n2	DC TO 2100			
MI-217n3	DC TO 1800			
MI-217n4	DC TO 2100 and 2300-2600			
MI-217n5	DC TO ALL			
MI-217n6	DC TO 1800 and 2300 - 2600			
MI-217n7	DC Block			
Auto-sense Priority				
MI-217nA.1	FPO TO 1800, 2100 and 2300 - 2600			
MI-217nA.2	XOR TO 1800, 2100 and 2300 - 2600			
MI-217nA.3	2300 - 2600 Priority 1, 2100 Priority 2 and 1800 Priority 3			
MI-217nA.4	1800 Priority 1, 2100 Priority 2 and 2300 - 2600 Priority 3			
MI-217nA.5	2100 Priority 1 2300 - 2600 Priority 2 and 1800 Priority 3			
MI-217nA.6	2100 Priority 1, 1800 Priority 2 and 2300 - 2600 Priority 3			
MI-217nA.7	1800 Priority 1, 2300 - 2600 Priority 2 and 2100 Priority 3			
MI-217nA.8	2300 - 2600 Priority 1, 1800 Priority 2 and 2100 Priority 3			

ELECTRICAL BLOCK DIAGRAM

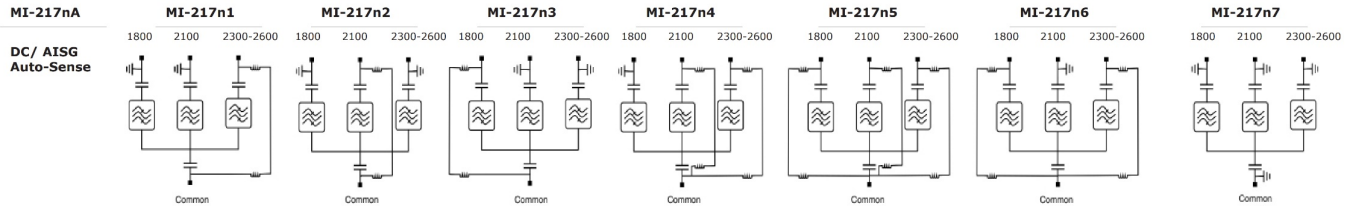

MECHANICAL BLOCK DIAGRAM

