


MI-757

QUADRUPLEXER 700-800/900/1800/2100-2600

The Kaelus MI-757 is a bi-directional Quadruplexer, designed to combine or split 700-800/900/1800/2100-2600 MHz. The MI-757 provides low insertion loss and high return loss with excellent passive inter-modulation performance in an extremely small and lightweight IP67 capable package

FEATURES

- Enables antenna & coax sharing for 700-800/900/1800/2100-2600 MHz bands systems.
- Compact & lightweight - perfect for Small Cell applications
- Low insertion loss & high return loss
- High passive IM performance
- Single and dual models available
- 7/16 (F) or 4.3-10 (F) connectors
- Hard Wired and DC Autosense versions available
- Provisions for wall or mast mounting

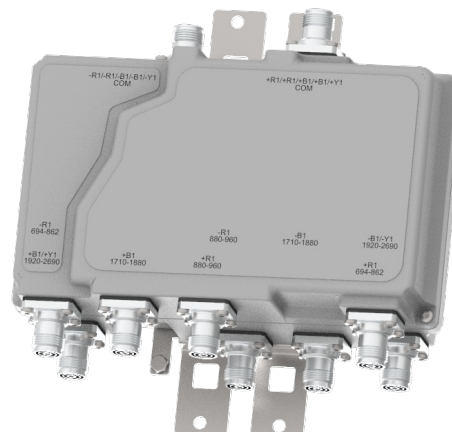

TECHNICAL SPECIFICATIONS

BAND NAME	700-800	900	1800	2100-2600
Passband	694 - 862 MHz	880 - 960 MHz	1710 - 1880 MHz	1920 - 2690 MHz
Insertion loss	0.2 dB typical, 0.5 dB maximum	0.2 dB typical, 0.4 dB maximum	0.2 dB typical, 0.6 dB maximum	0.2 dB typical, 0.7 dB maximum
Return loss	>18 dB	>18 dB	>18 dB	>18 dB
Intermodulation products	-160 dBc at 2 x 43dBm TX Carrier			
Rejection	50 dB minimum in 880 - 2690 MHz	50 dB minimum in 790 - 862, 1710 - 2170, 2300 - 2400, 2500 - 2690 MHz	50 dB minimum in 790 - 960 and 1920 - 2690 MHz	50 dB minimum in 790 - 1880 MHz

ELECTRICAL

Impedance	50 Ω
-----------	------

DC / AISG

For hardwired versions, DC/AISG can be fully connected (DC all) or a specific connection can be orderd (DC custom). For DC autosense versions, the DC/AISG path is automatically selected. In bottom of the tower applications (combiner mode), each RF channel port is sequentially checked for the presence of DC voltage. If more than one port has voltage, the port that has the highest (programmed) priority is passed to the common port. If a short circuit is detected on the common port DC/AISG is disabled. In top-of-tower applications (splitter mode), DC/AISG is passed to all ports that do not present a short circuit. If a short circuit is detected, the shorted RF port will be disabled for DC/AISG while other RF ports remain connected.

Insertion loss	1 dB max
Return loss	12 dB min
Input voltage range	8 - 30 V DC max 0.3 W
DC current rating	3 A continuous, Drop max 2.4 V
Compliance	3GPP TS 37.461

ENVIRONMENTAL

For further details of environmental compliance, please contact Kaelus.

Temperature range	-40 °C to +65 °C -40 °F to +149 °F
Ingress protection	IP67
Lightning protection	5 kA maximum (8/20 us)
MTBF	> 1,000,000 Hours
Compliance	ETSI EN 300 019-1-4 class 4.1E, RoHS

MECHANICAL		
Feature	Single Mount	Dual Mount
Dimensions H x D x W	267 x 160 x 58 mm 10.5 x 6.30 x 2.3 in	267 x 160 x 116 mm 10.5 x 6.30 x 4.6 in
Volume	2.5 l	5.0 l
Weight	4.0 kg 8.82 lb	6 kg 13.23 lb
Finish	Painted, NCS 1502-R (Light Grey)	
Mounting	Hose clamps or wall mount (Supporter pole Diameter: 40 - 140 mm)	
Feature	Single Mount	Dual Mount
Dimensions H x D x W	267 x 160 x 72 mm 10.5 x 6.30 x 2.8 in	267 x 160 x 138 mm 10.5 x 6.30 x 5.4 in
Volume	3.0 l	5.8 l
Weight	4.0 kg 8.82 lb	6 kg 13.23 lb
Finish	Painted, NCS 1502-R (Light Grey)	
Mounting	Hose clamps or wall mount (Supporter pole Diameter: 40 - 140 mm)	


ORDERING INFORMATION

PART NUMBER	CONFIGURATION	OPTIONAL FEATURES	CONNECTORS	DC/AISG CONFIGURATION
MI-7570n	Single Mount	BASE MODEL	7/16 (F)	Refer to DC /AISG table
MI-7571n	Dual Mount	BASE MODEL	7/16 (F)	Refer to DC /AISG table
MI-7573n	Single Mount	BASE MODEL	4.3-10 (F)	Refer to DC /AISG table
MI-7574n	Dual Mount	BASE MODEL	4.3-10 (F)	Refer to DC /AISG table
DC / ASIG CONFIGURATION				
MI-757nA	Auto-sense			
MI-757n1	DC BLOCK			
MI-757n2	DC TO All			
MI-757n3	DC TO 1800			
MI-757n4	DC TO 2100-2600			
MI-757n5	DC TO 1800 and 2100-2600			
MI-757n6	DC TO 700-800, 1800 and 2100-2600			
Auto-sense Priority				
MI-757nA.1	FPO TO 700-800, 900, 1800 and 2100-2600			
MI-757nA.2	XOR TO 700-800, 900, 1800 and 2100-2600			
MI-757nA.3	2100-2600 priority 1, 1800 priority 2, 900 priority 3 and 700-800 priority 4			
MI-757nA.4	700 - 800 Priority 1, 900 Priority 2 and 1800 Priority 3 and 2100-2600 priority 4			
MI-757nA.5	1800 priority 1, 700-800 priority 2, 2100-2600 priority 3 and 900 priority 4			
MI-757nA.6	2100-2600 priority 1, 700-800 priority 2, 1800 priority 3 and 900 priority 4			
MI-757nA.7	2100-2600 priority 1, 700-800 priority 2, 900 priority 3, and 1800 priority 4			


ELECTRICAL BLOCK DIAGRAM

MI-757nA


**DC/ AISG
Auto-Sense**




MI-757n1




MI-757n2




MI-757n3



MI-757n4



MI-757n5



MI-757n6

MECHANICAL BLOCK DIAGRAM

